

Product Description

The SLC-N203-C is an advanced street light controller designed for LED fixtures with NEMA sockets. All lamps with NEMA sockets can now be integrated and connected with esave solutions. This controller features GPS positioning and global cellular connectivity, enabling intelligent and efficient street light management. The SLC-N203-C also supports PIR sensors. Through an automatic 2.4 GHz mesh network, it enables seamless communication between controllers and gateways, providing "light on demand" based on real-time conditions.

BENEFITS

- Operational cost savings through remote monitoring and real-time maintenance.
- Display of the current luminaire status data.
- Track and evaluate your energy use.
- Remote monitoring of individual controllers without gateway (eSIM included).
- Support DALI DT6, DT7 and DT8



FEATURES



Remote Management

The Light Management Platform provides real-time and historical data of the entire lighting network. It allows the remote management and control of all connected lighting points using a user-friendly cloud interface.



On-Site Management

The intuitive, easy-to-use configuration tool allows the on-site configuration of all parameters (i.e., dimming level etc.) for either an individual or a group of luminaires.



Global Cellular Connectivity

Preinstalled eSIM for instant data connection worldwide. Protocols supported: LTE Cat M1, NB-IoT NB2, EGPRS.



Automatic GNSS Positioning

The GNSS receiver provides precise, geo-located date/time data, enabling the accurate and automatic control of the lighting behavior.



Mesh Network

The Communication is ensured via an automatic, organizing 2.4 GHz mesh network. Each streetlight communicates with all luminaires which can be reached.



AstroDim

AstroDim provides the accurate sunrise and sunset timing of the very location as a basis for the definition of the light control profiles.



Brightness Sensor

With the integrated brightness sensor, the light can be automatically switched on or off depending on the ambient light level.



Tilt Sensor

Detects X, Y, and Z-axis movements through integrated inclination sensing. Generates alerts when changes in inclination occur, such as in the event of a collision of a road user with a pole.




Temperature Sensor

With the integrated temperature sensor, the controller can be actively monitored. By regularly checking the information about the luminaire status, proactive maintenance and failures can be avoided.




Gateway Function

Remote monitoring of individual controllers without gateway

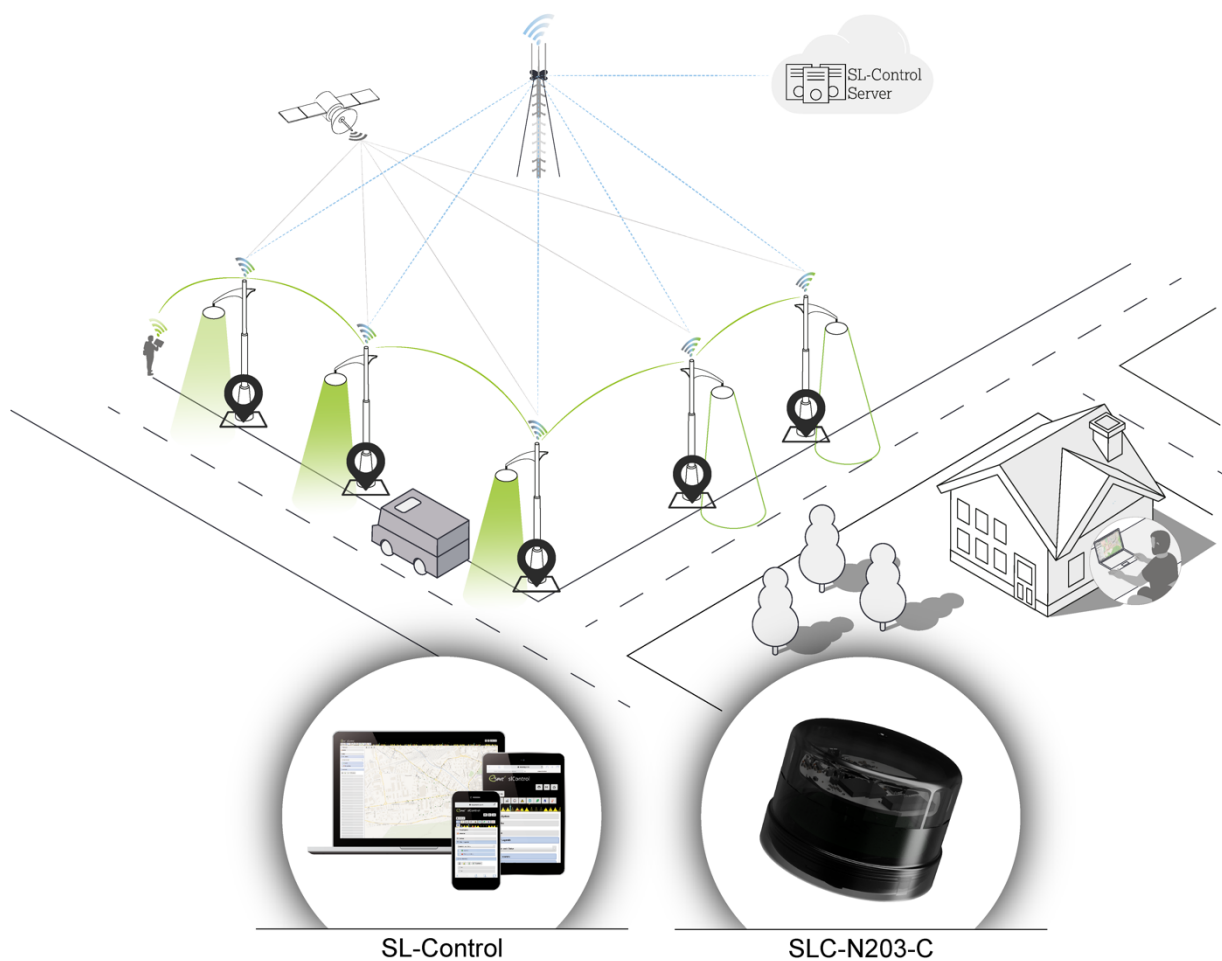


DIMENSIONS & WEIGHT

SLC-N203-C

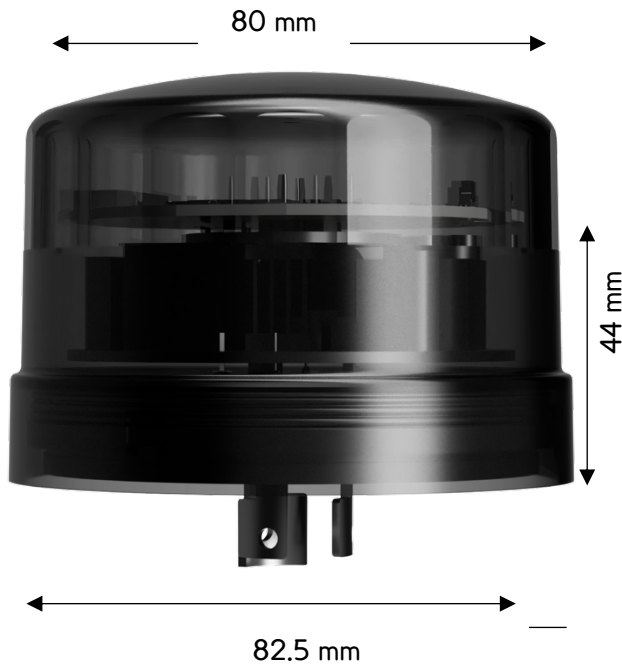

NEMA Connector


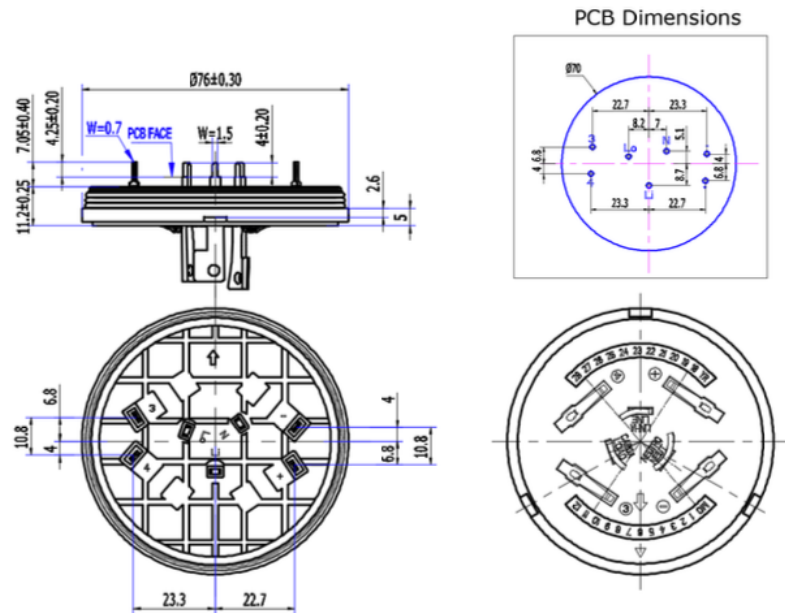


Width	82.5 mm
Dome width	80 mm
Height	44 mm
Product weight	73 g

Outer diameter	30.0 mm
Height without plug	28.4 mm
Thread length	18.7 mm
Thread pitch	M20 x 1.5
Material	PBT
Wire size	20-16 AWG (0.5 - 1.5 mm ²)
Mounting	Torque mounting nut 1.8 to 2.4 Nm using a 27 mm hex socket

Wiring

WIRING DIAGRAM
(FOR GENERAL INFORMATION ONLY)

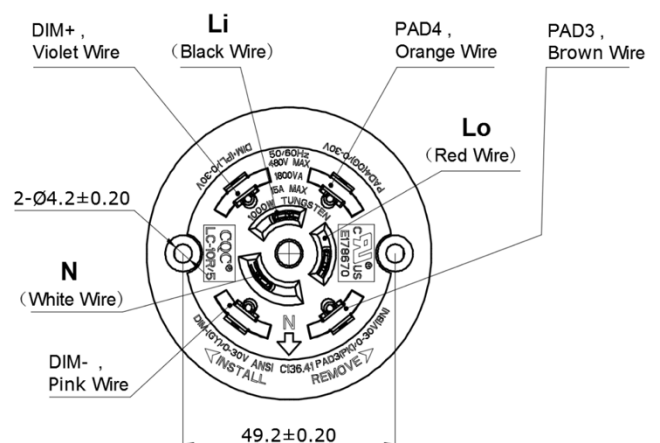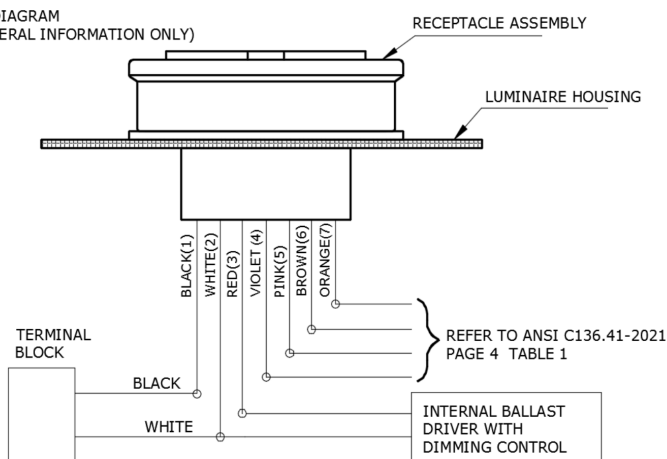

Maximum Ratings

Power supply max. voltage range	120-277 VAC (applicable 105-305V)
Power supply frequency	50/60HZ
Storage temperature range	-40~+70°C

Operating Characteristics

Supply voltage range	100 - 240VAC
Current input	6 - 60 mA
Surge protection	10KV, 5KV
Power supply energy consumption	≤ 1.5W
Operating temperature	-40~+70°C
DALI input current	2 mA
IP and IK rating of the housing	IP66 and IK10
Max. switching current of the Relais	15A
For 0-10V output version-> Max. Analog output current	20mA

Mesh characteristics

RF frequency range	2.4 GHz
RF nominal output power	+8 dBm
Receiver sensitivity	-100 dBm

Cellular characteristics

Protocols	LTE Cat M1, NB-IoT NB2, EGPRS
Frequency Bands (MHz)	CAT M1: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B27/B28/ B66/B8 NB-IoT NB2: B1/B2/B3/B4/B5/B8/B12/B13/B18/ B19/B20/B25/B28/B66/B71/B8 EGPRS: 850/900/1800/1900 MH

Housing

Dome material	Polycarbonate
Dome color	Transparent Smoke Gray
Body material	PBT
Body color	Grey
Impact strength grade	IK09

4 Different SLC-N203 Models

Dome material	Cellular - e-SIM	Output Type
SLC-N203-A	No	Analog
SLC-N203-D	No	DALI
SLC-N203-CA	Yes	Analog
SLC-N203-CD	Yes	DALI