

## BENEFITS

- Operational cost savings through remote monitoring and real-time maintenance.
- Display of the current luminaire status data.
- Track and evaluate your energy use.
- Remote monitoring of individual controllers without gateway (eSIM included).
- Support DALI DT6, DT7 and DT8 TC /RGBW

## FEATURES



### Remote Management

The Light Management Platform provides real-time and historical data of the entire lighting network. It allows the remote management and control of all connected lighting points using a user-friendly cloud interface.



### On-Site Management

The intuitive, easy-to-use configuration tool allows the on-site configuration of all parameters (i.e., dimming level etc.) for either an individual or a group of luminaires.



### Global Cellular Connectivity

Preinstalled eSIM for instant data connection worldwide. Protocols supported: LTE Cat M1, NB-IoT NB2, EGPRS.



### Automatic GNSS Positioning

The GNSS receiver provides precise, geo-located date/time data, enabling the accurate and automatic control of the lighting behavior.



### Mesh Network

The Communication is ensured via an automatic, organizing 2.4 GHz mesh network. Each streetlight communicates with all luminaires which can be reached.



### AstroDim

AstroDim provides the accurate sunrise and sunset timing of the very location as a basis for the definition of the light control profiles.



### Brightness Sensor

With the integrated brightness sensor, the light can be automatically switched on or off depending on the ambient light level.



### Tilt Sensor

Detects X, Y, and Z-axis movements through integrated inclination sensing. Generates alerts when changes in inclination occur, such as in the event of a collision of a road user with a pole.



### Temperature Sensor


With the integrated temperature sensor, the controller can be actively monitored. By regularly checking the information about the luminaire status, proactive maintenance and failures can be avoided.



### Gateway Function

Remote monitoring of individual controllers without gateway




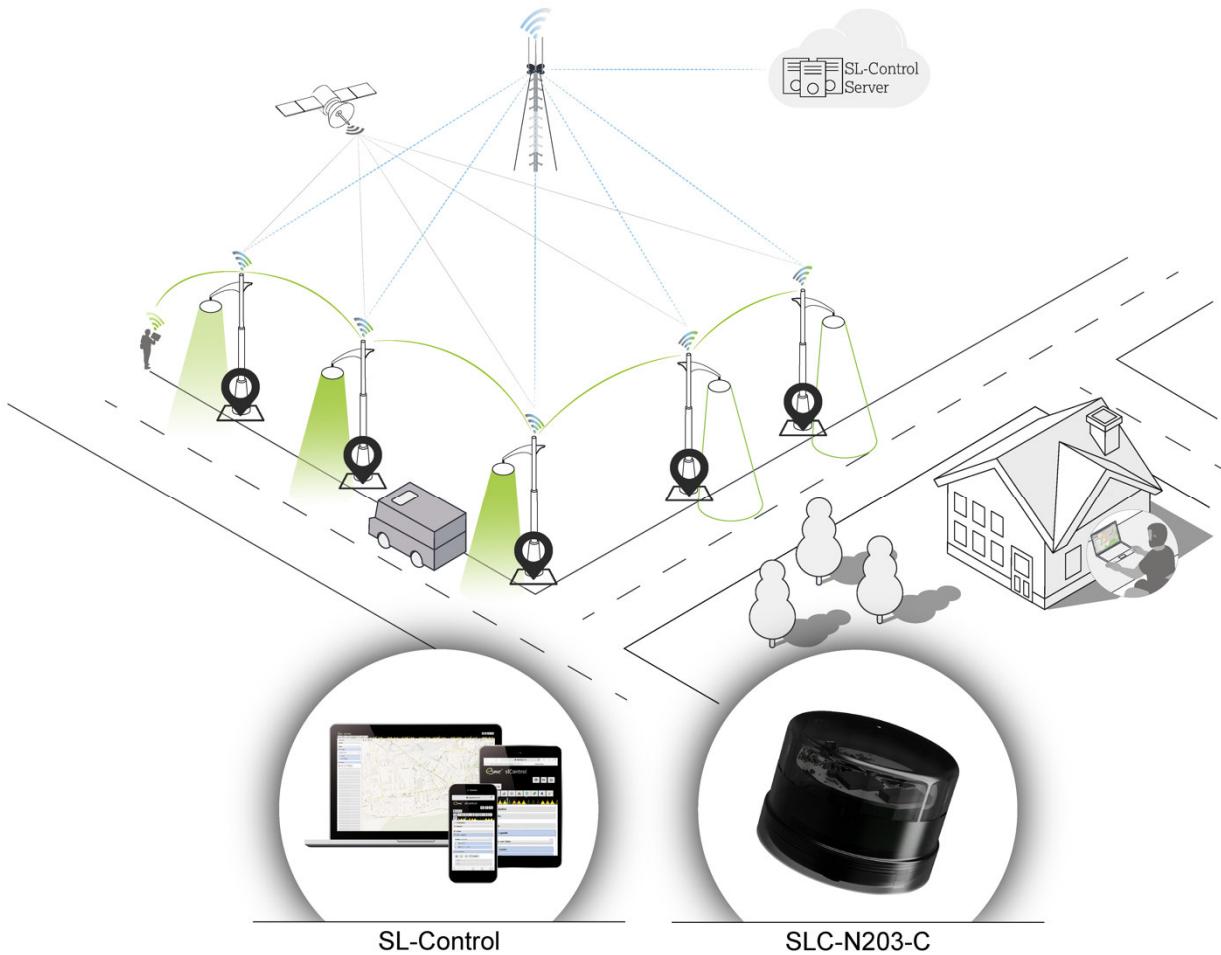

Thanks to the integrated eSIM and gateway function, an SLC-N203-C can establish a connection to the SLControl web platform while maintaining a network with all other esave equipped lights within reach.

## DIMENSIONS & WEIGHT



SLC-N203-C

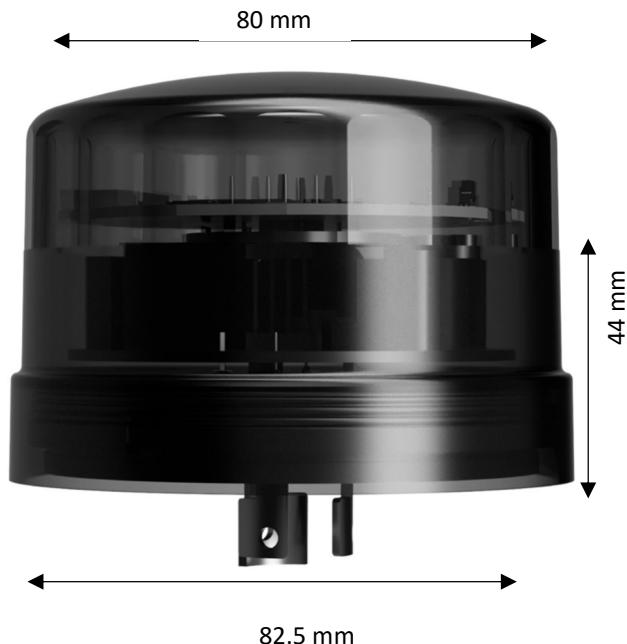

Width	82.5 mm
Dome width	80 mm
Height	44 mm
Product weight	73 g

Outer diameter	30.0 mm
Height without plug	28.4 mm
Thread length	18.7 mm
Thread pitch	M20 x 1.5
Material	PBT
Wire size	20-16 AWG (0.5 - 1.5 mm <sup>2</sup> )
Mounting	Torque mounting nut 1.8 to 2.4 Nm using a 27 mm hex socket

## Wiring

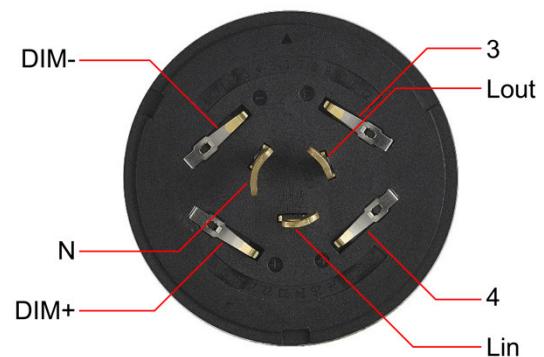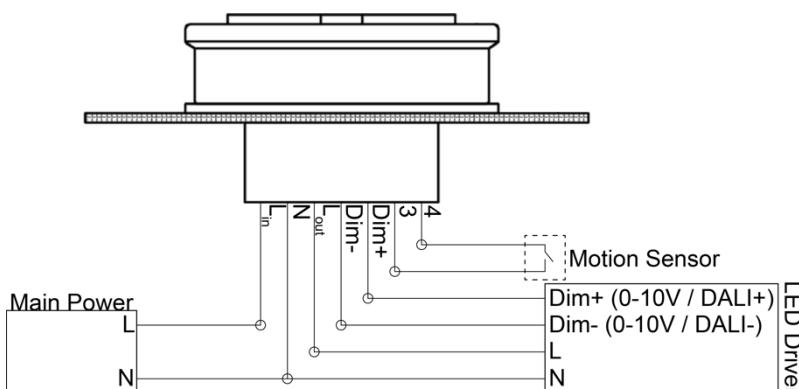

## Maximum Ratings

<b>Power supply max. voltage range</b>	120-277 VAC (applicable 105-305V)
<b>Power supply frequency</b>	50/60HZ
<b>Storage temperature range</b>	-40~+70°C

## Operating Characteristics

<b>Supply voltage range</b>	120-277 VAC (applicable 105-305V)
<b>Current input</b>	6 – 60 mA
<b>Surge protection</b>	10KV, 5KV
<b>Power supply energy consumption</b>	≤ 1.5W
<b>Operating temperature</b>	-40~+70°C
<b>DALI input current</b>	2 mA
<b>IP and IK rating of the housing</b>	IP66 and IK10
<b>Max. switching current of the Relais</b>	15A
<b>For 0-10V output version-&gt; Max. Analog output current</b>	20mA

## Mesh characteristics

<b>RF frequency range</b>	2.4 GHz
<b>RF nominal output power</b>	+8 dBm
<b>Receiver sensitivity</b>	-100 dBm

## Cellular characteristics

<b>Protocols</b>	LTE Cat M1, NB-IoT NB2, EGPRS
<b>Frequency Bands (MHz)</b>	CAT M1: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B27/B28/B66/B8 NB-IoT NB2: B1/B2/B3/B4/B5/B8/B12/B13/B18/ B19/B20/B25/B28/B66/B71/B8 EGPRS: 850/900/1800/1900 MH



SLC-N203

Street Light Controller NEMA203

## Housing

Dome material	Polycarbonate
Dome color	Transparent Smoke Gray
Body material	PBT
Body color	Grey
Impact strength grade	IK09

## 4 Different SLC-N203 Models

Model	Cellular	Output Type
SLC-N203-A	No	Analog (1 - 10V)
SLC-N203-D	No	DALI
SLC-N203-CA	Yes	Analog (1 - 10V)
SLC-N203-CD	Yes	DALI