



## Product Description

The SLC-Hub203-G is a smart street lighting controller for LED luminaires with a Zhaga connector. It enables intelligent lighting control in a compact, integrated device and supports easy retrofit in new or existing installations.

An integrated GNSS module provides automatic positioning and commissioning. Controllers communicate via a self-healing 2.4 GHz mesh network, ensuring reliable connectivity across the lighting system.

The SLC-Hub203-G is a D4i certified / Type A device and SR certified

## BENEFITS

- Operational cost savings through remote monitoring and real-time maintenance
- Display of the current luminaire status data
- Track and evaluate your energy use
- The controller can output its own position with the support of automatic GNSS positioning
- Can be managed by Cellular Devices or SL-Gateway
- Support of DALI DT6, DT7 and DT8 TC / RGBW



## FEATURES



### Remote Management

The Light Management Platform provides real-time and historical data of the entire lighting network. It allows the remote management and control of all connected lighting points using a user-friendly cloud interface.



### On-Site Management

The intuitive, easy-to-use configuration tool allows the on-site configuration of all parameters (i.e., dimming level etc.) for either an individual or a group of luminaires.



### Automatic GNSS Positioning

The GNSS receiver provides precise, geo-located date/time data, enabling the accurate and automatic control of the lighting behavior.



### Mesh Network

The Communication is ensured via an automatic, organizing 2.4 GHz mesh network. Each streetlight communicates with all luminaires which can be reached.



### AstroDim

AstroDim provides the accurate sunrise and sunset timing of the very location as a basis for the definition of the light control profiles.



### Brightness Sensor

With the integrated brightness sensor, the light can be automatically switched on or off depending on the ambient light level.



### Tilt Sensor

Detects X, Y, and Z-axis movements through integrated inclination sensing. Generates alerts when changes in inclination occur, such as in the event of a collision of a road user with a pole.




### Temperature Sensor

With the integrated temperature sensor, the controller can be actively monitored. By regularly checking the information about the luminaire status, proactive maintenance and failures can be avoided.



### Optional Motion Sensor

Through the use of motion sensors, the lighting becomes dynamic. Once the sensors register analogue movement in the illumination area, light intensity is automatically increased to a higher level


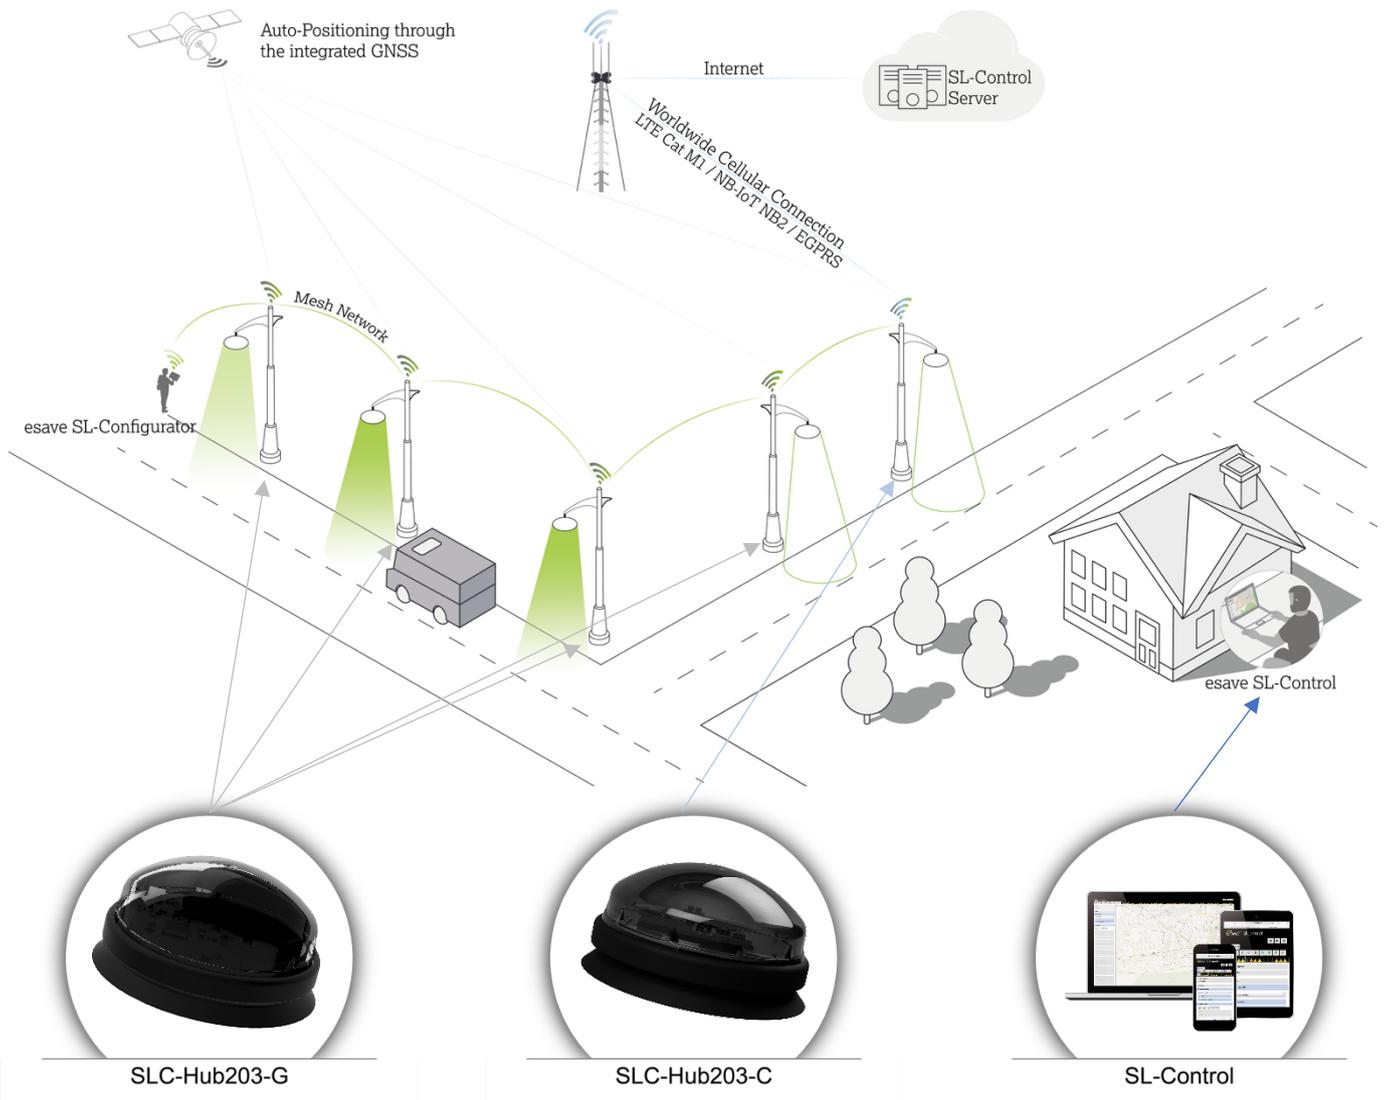


Because the SLC-Hub203-G has a GNSS module assembled, the device can automatically output its coordinates and automatically display itself on the map in SL-Control or SL-Configurator

## DIMENSIONS & WEIGHT


### SLC-Hub203-G

### Zhaga Connector

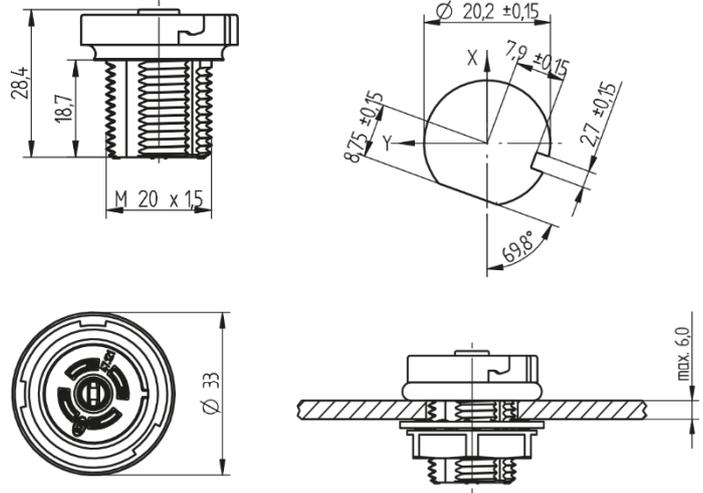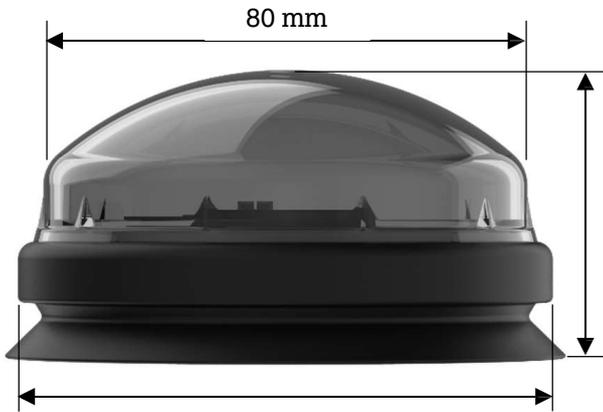

<b>Width</b>	81.5 mm
<b>Dome width</b>	80 mm
<b>Height</b>	44 mm
<b>Product weight</b>	75 g

<b>Outer diameter</b>	30.0 mm
<b>Height without plug</b>	28.4 mm
<b>Thread length</b>	18.7 mm
<b>Thread pitch</b>	M20 x 1.5
<b>Material</b>	PBT
<b>Wire size</b>	20-16 AWG (0.5 - 1.5 mm <sup>2</sup> )
<b>Mounting</b>	Torque mounting nut 1.8 to 2.4 Nm using a 27 mm hex socket

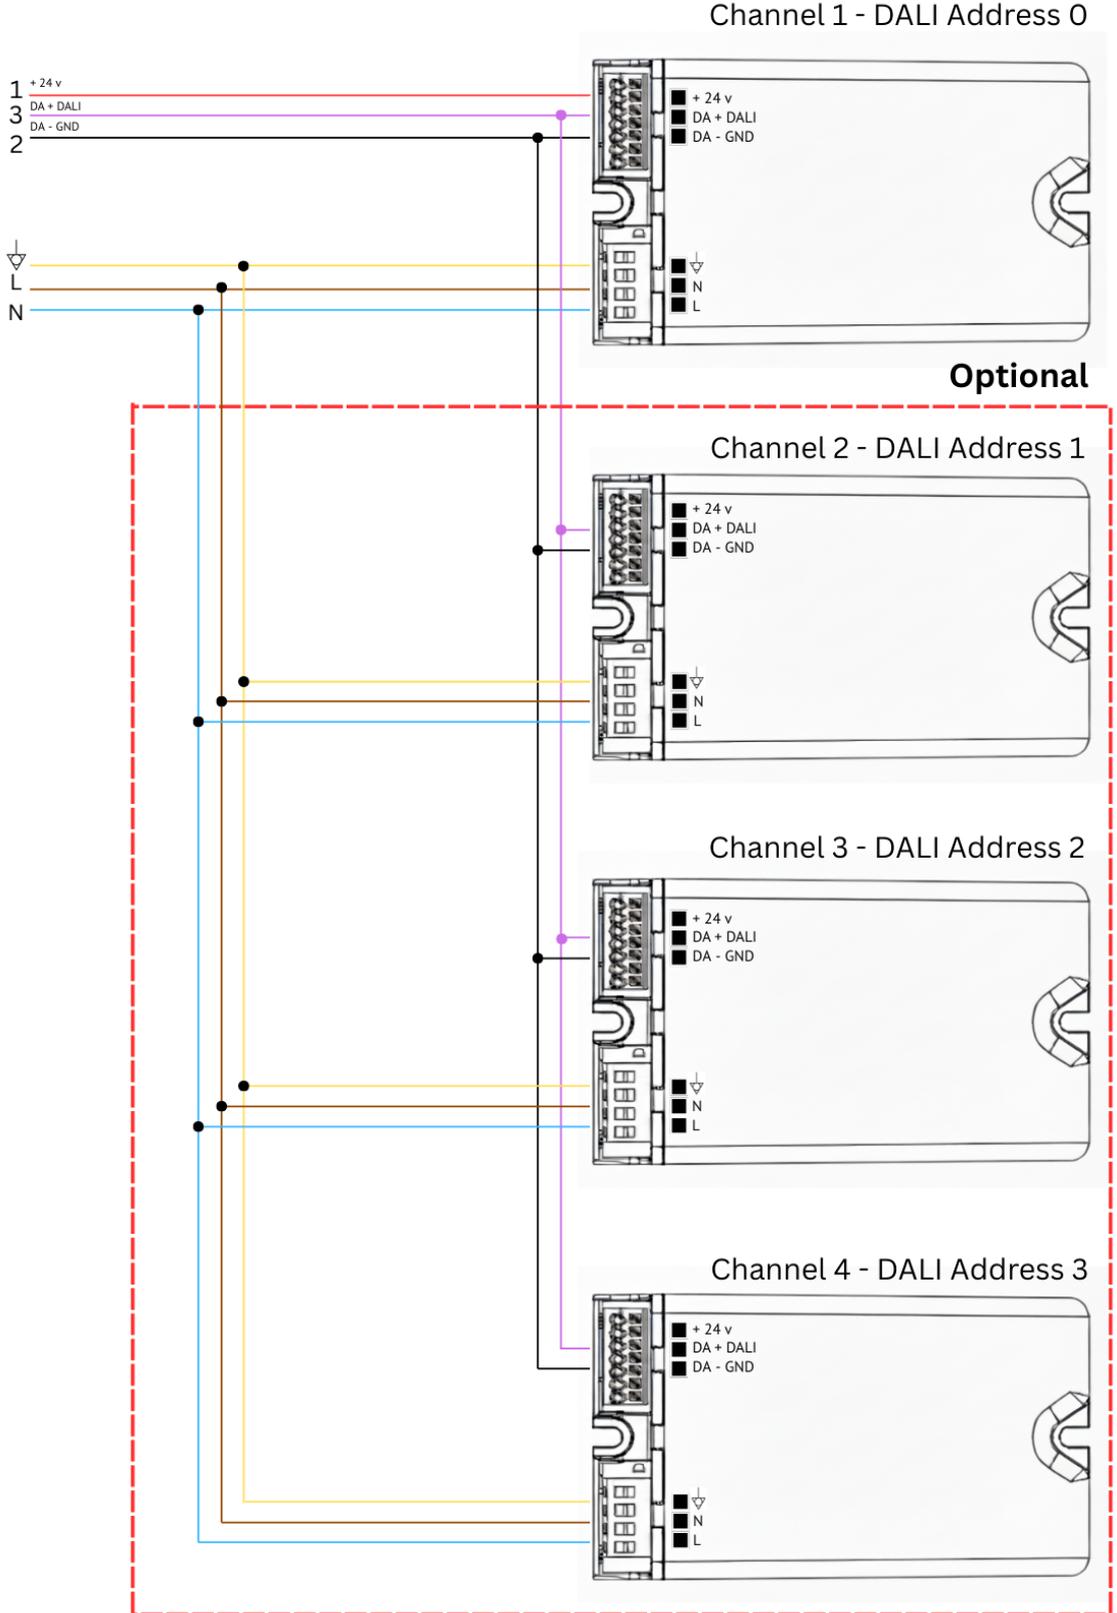

## Maximum Ratings

Supply Voltage	0 – 34 V DC
Current Input	6 – 60 mA
Storage temperature	-40...+90°C

## Operating parameters

Supply voltage range	12 – 30 V DC   typ. 24 V DC
Current input (24 V DC)	7 – 15 mA
Average Power usage (24 V DC)	180 mW
Signal input (motion detection)	$V_{MOT\ HIGH\ Level}: 12 - V_{cc}$   $V_{MOT\ LOW\ Level}: 0.0 - 0.5\ V$
Operating temperature	-40...+80 °C
DALI input current	max: 250 mA
Protection class	IP66

## Mesh characteristics

RF frequency range	2.420 – 2.480 GHz
RF nominal output power	+8 dBm
Receiver sensitivity	-100 dBm

## Materials & Colors

Dome material	Polycarbonate
Dome color	Transparent Smoke Gray
Body material	PBT
Body color	Grey
Impact Protection	IK09